

MAX BR1 cellular router

Industrial-Grade 4G LTE/3G Router

PEPWAVE
Broadband Possibilities



Automatic Failover 4G LTE Router.

The BR1 offers redundant SIM slots with automatic switching, DC or terminal block power capability, advanced GPS fleet tracking, and remote management, all packed into a durable metal enclosure. It is also Verizon XLTE certified.

Compatible With:



*Selected models



Redundant SIM Slots for Multiple Carriers.

Redundant SIM slots with automatic switching for reliable network. You can set the BR1 to automatically switch SIM cards when you're in danger of exceeding a data cap. It also allows you travel across borders without changing SIM cards manually.



Fleet Tracking and Management

With built-in GPS fleet tracking and InControl cloud-based management, you can keep tabs on location and manage your mobile network from any Internet-connected device.



Customize Captive Portal

Branding your captive portal is as easy as uploading your logo and terms & conditions. You can easily set bandwidth allowance and access duration per user or manage access using RADIUS.



SpeedFusion Hot Failover

SpeedFusion technology powers MAX BR1 for seamless failover.



Terminal Block for Secure Power Supply

MAX BR1 is equipped with a terminal block for secure power installation in vehicles and other locations.




Certified Toughness

In addition to rugged metal enclosure, BR1 has certifications on:
Shock and vibration resistance (EN 61373:1999, IEC 61373:1999)
Railway applications (EN 50155)
Electromagnetic Compatibility (EN 61000)

Specifications

MAX BR1	
WAN Interface	1x FE Embedded LTE/3G Modem with Redundant SIM Slots
LAN Interface	2x FE
Wi-Fi Interface	802.11b/g/n 300 Mbps Wi-Fi WAN and/or AP
Router Throughput	100Mbps
Recommended Users	1-60
Cellular and GPS Antenna Connector	2x SMA Antenna Connectors 1x SMA GPS Antenna Connector 1x Wi-Fi Connector
Power Input	DC Jack/Terminal Block: 10V – 30V DC
Power Consumption	16W (max.)
Dimensions	5.8 x 5.0 x 1.6 inches 147 x 128 x 40 mm
Weight	0.96 pound 435 grams
Operating Temperature	-40° – 149°F -40° – 65°C
Humidity	15% – 95% (non-condensing)
Certifications	FCC, CE, RoHS, E-Mark, IC Class I, Division II: Hazardous Locations RF Port Lightning Immunity: ITU-T K.20 (+/- 1.5 kV) EN 61373:1999 IEC 61373:1999 : Shock and Vibration Resistance EN 50155: Railway Applications EN 61000: Electromagnetic Compatibility
Warranty	1-Year Limited Warranty

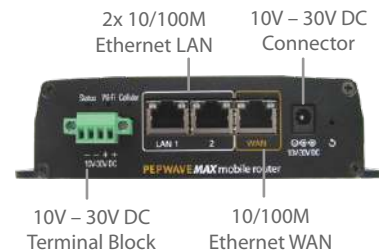

Ordering Information

	Product Code	Carrier/Region	Embedded Modem	4G Bands	3G Bands
4G LTE	MAX-BR1-LTEA-WT	Worldwide	1	B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41	WCDMA/HSPA+/DC-HSPA+: B1, B2, B3, B4, B5, B8
4G LTE	MAX-BR1-LTE-E-T	Europe/International	1	B1, B3, B5, B7, B8, B20, B38 (TDD), B40 (TDD), B41 (TDD)	WCDMA/HSPA+/DC-HSPA+: B1, B5, B8
3G	MAX-BR1-AE-T	Worldwide	1	-	WCDMA/HSDPA/HSUPA/HSPA+: B1, B2, B4, B5, B6, B8 EDGE/GPRS/GSM: B2, B3, B5, B8

Add-on Feature

Product Code	Product Name	Description
MAX-BR1-ADV	Advanced Feature Pack	Package includes a software license key for Advanced Car-Fi Roaming; and SpeedFusion and IPsec X.509 Certificate Support
PVN-LC-05	PepVPN License Key for Velocity and BR1 family	Enables up to 5 PepVPN connections
MAX-HD-020-SPF	PepVPN License Key	Enables up to 20 PepVPN connections
MAX-LC-DIM	Drop-in Mode for MAX BR1 Series	Activate the Drop-in Mode for the MAX BR1 Series

Features

WAN
Support for PPPoE, Static IP, DHCP
WAN Link Health Check
Bandwidth Allowance Monitor
Support for Dynamic DNS services
WAN Port Convertible into LAN Port

LAN
DHCP Server for LAN Clients
Extended DHCP Options
DHCP Reservation
DNS Proxy for LAN Clients
VLAN on LAN Support
Per-Port VLAN Support

Security
Stateful Firewall
DoS Prevention
Web Blocking
Web Filtering Blacklist

Load Balancing
Intelligent Failover
Session Persistence
Per-Service Load Distribution
Multiple Algorithms

Advanced QoS
Individual Bandwidth Limit
Application Prioritization
SIP, HTTPS, VPN QoS
Custom Application QoS

Complete VPN Solution
PepVPN/SpeedFusion Hot Failover
Site-to-Site VPN
Hot Failover
256-bit AES Encryption
Pre-shared Key Authentication
Dynamic Routing
X.509 Certificate Support*
IPsec VPN (Network-to-Network)
X.509 Certificate Support*

Networking
NAT and IP Forwarding
Static Routes
Port Forwarding
Many to One, One to One NAT
NAT Pool

SIP ALG, H.323 ALG
UPnP, NAT-PMP
BGP, OSPFv2 and RIPv2 Support

Captive Portal Support
Support for Wired and Wireless LAN Clients
Support for RADIUS Authentication
Time and Usage Quotas on Open Access Mode
Built-in Customizable Splash Page

Global Positioning System
Integrated GPS
Device Location Map
Location Tracking Data with InControl 2
Fleet Management with InControl 2

*Available as optional feature.